Distributed by:

JAMECO® ELECTRONICS

www.Jameco.com ✦ 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 224258 (02-09-1134-C)

PART NO.	ENG. NO.	SUFFIX WAS
02-09-1134	1377-A(P913)L	-ATL
02-09-5132	1377-A(P563)L	-GL
PRELIMINARY	1377-A(P603)L	



LEGEND

1377-A(****)*

- FORM: L=LOOSE
- FINISH CODE
- P=PREPLATE, BLANK=POSTPLATE

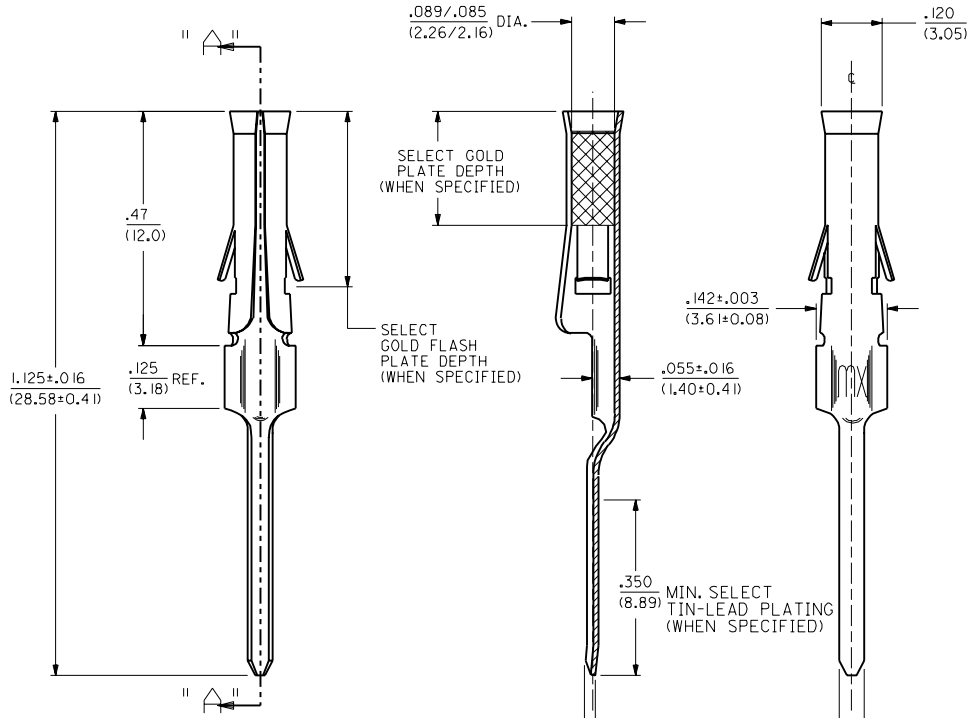

SECT. "A-A"

NOTES:
1. RECOMMENDED P.C. BOARD HOLE SIZE IS .062±.002/(1.57±0.05) DIA.
2. INSERTION FORCE: 3.5 LBS. MAX. WHEN TERMINAL IS INSERTED INTO AN .093 SERIES HOUSING.
3. THIS PART CONFORMS TO PROD. SPEC. 02-09.

FINISH CODES:
- 913 HOT TIN-LEAD DIP .000100/(0.00254) MIN.
- 563 SELECT GOLD PLATE .000030/(0.00076) MIN. IN CONTACT AREA, SELECT TIN-LEAD PLATE .000100/(0.00254) MIN. IN TAIL AREA OVER .000050/(0.00127) NICKEL OVERALL.
- 603 SELECT GOLD PLATE .000030/(0.00076) MIN. IN CONTACT AREA, SELECT TIN-LEAD PLATE .000100/(0.00254) MIN. IN TAIL AREA OVER .000050/(0.00127) NICKEL OVERALL WITH SELECT GOLD FLASH .000010/(0.00025) MAX. IN AREA INDICATED.

MATERIAL:
CARTRIDGE BRASS, ALLOY #C26000, .010/(0.25) THICK, SPRING TEMPER

LTR.	REVISIONS
U	REVISE PER ECR U5 0799 GC 2/14/95 RW
T	ADD .125 REF. ECR U2 0809 GC 5/21/92 RW
S	ADDED NOTE 3. ECR U1 0722 GC 6/11/91 RW
R	FINAL RELEASE ECR U1 0390 GC 2/18/91 RW

MFG. SH. REV.

▽=0 ▼=0 REVISE ONLY ON CAD SYSTEM

DIMENSIONS SHOWN (METRIC) INCH
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± .010	---
2 PLACE	± .014	± 0.25
1 PLACE	---	± 0.36

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DRWG. BY GC | CHK'D. BY RW | APP'D. BY GWF | SCALE 6 : 1

TITLE: P.C. TAIL TERMINAL FEMALE, .093/(2.36) DIA.

molex MOLEX INCORPORATED LISLE,ILL. 60532 U.S.A.

SHEET NO. 1 | DATE 2/18/91

PART NO. SEE CHART | DRWG. NO. SD-1377-•

FILE NAME S1377X1.DGN

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY to MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIV. CP | SIZE C